


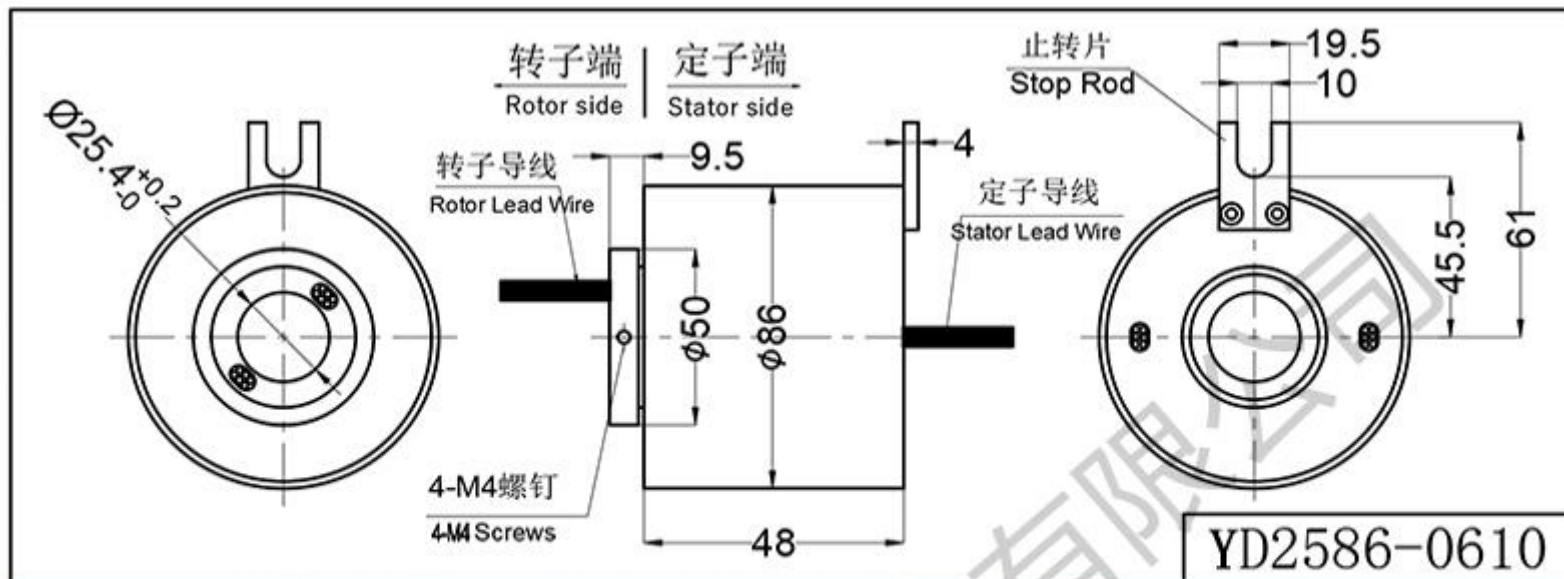

## 技术规格参数 Technical Specifications and Parameters

|                               |                                                           |                                                                                       |                                                                |
|-------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------|
| 通路数 (Circuits)                | 2~96 (可定制更多)<br>(more options available)                  | 电流 (Current)                                                                          | 信号 (2A) ; 功率10A/路<br>Signal: 2A ; Power: 10A/Ring              |
| 电压 (Voltage)                  | 600VDC/VAC                                                | 最高转速 (Max Speed)                                                                      | 建议1-2500RPM之间<br>Suggest between 1-2500                        |
| 外壳材质<br>(Housing Material)    | 铝轴塑盖<br>(Aluminum shaft plastic cover)                    | 扭矩 (Torque)                                                                           | 0.02N.m+0.01N.m/6路(ring)                                       |
| 工作寿命<br>(Working Life)        | >4千万转 (按等级请咨询)<br>>4 million<br>(Please consult by grade) | 接触材料<br>(Contact Material)                                                            | 信号: 金合金; 功率: 银合金<br>Signal: gold alloy;<br>Power: Silver alloy |
| 电气噪音<br>(Electrical noise)    | < 0.01 ( $\Omega$ )                                       | 接触电阻<br>(Contact Resistance)                                                          | < 1毫欧 (m $\Omega$ )                                            |
| 耐压强度<br>(Dielectric strength) | 1000VDC@50Hz                                              | 导线规格<br>(Electrical Wire)                                                             | UL Teflon@Awg22,Awg16                                          |
| 绝缘强度<br>(Insulation Strength) | 1000M@600VDC                                              | 导线线长<br>(Wire Length)                                                                 | 300mm                                                          |
| 工作温度<br>(Working Temp)        | -40°C to 80°C                                             |  |                                                                |
| 工作湿度 (Humidity)               | 10% to 85% RH                                             |                                                                                       |                                                                |
| 防护等级<br>(Protection Grade)    | IP51                                                      |                                                                                       |                                                                |
| 认证 (Certificate)              | ROHS                                                      |                                                                                       |                                                                |